

University  
of Glasgow

# Introduction to Networked Systems

Networked Systems 3  
Lecture 1

# Lecture Outline

- Course Administration
  - Aims, Objectives, Intended Learning Outcomes
  - Course Outline
  - Labs and Assessment
  - Reading List
- Introduction to Networks

# Course Administration

# Contact Details and Website

- Lecturers

- Dr Colin Perkins (Glasgow) and Dr Ian Thng (Singapore)
- No scheduled office hours – make appointments by email to discuss the course outside scheduled lecture or lab times if necessary

- Lecture notes and other material on online:

- <http://csperkins.org/teaching/ns3/> (or on the School's Moodle site)
- Paper handouts will not be provided – the act of taking notes helps learning

# Aims and Objectives

- To introduce the fundamental concepts and theory of communications
- To provide a solid understanding of the technology that supports modern networked computer systems
- To introduce low-level network programming
- To give students the ability to evaluate and advise industry on the use and deployment of networked systems

# Intended Learning Outcomes

- By the end of the course, students should be able to:
  - Describe and compare capabilities of various communication technologies and techniques;
  - Know the differences between networks of different scale, and how these affect their design;
  - Describe the issues in connecting heterogeneous networks;
  - Describe importance of layering, and the OSI reference model;
  - Understand demands of different applications on quality of service requirements for the underlying communication network;
  - Demonstrate an understanding of the design and operation of an IP network, such as the Internet, and explain the purpose and function of its various components; and
  - Write simple communication software

# Course Outline

Week	Lecture Slot 1	Lecture Slot 2	Laboratory Session
1	Introduction to Network Systems	Protocols and Layers	Introduction to Network Programming in C
2	Communications Theory	Physical Layer	
3	The Data Link Layer	Media Access Control	Assessed Exercise: Web Server
4	Bridging	Internetworking	
5	Addressing	Intra-domain Routing	
6	Inter-domain Routing	The Transport Layer	
7	TCP	UDP and NAT	
8	Congestion Control	Session Layer and DNS	
9			
10	Presentation & Application Layers	Security	

Lectures teach the theory of how the network operates

Laboratory sessions give practice developing networked applications in C

# Assessment

- Assessed exercise: 20%
  - One formative exercise (weeks 1-2): introduction to network programming
  - One summative exercise (weeks 3-8): implement a basic web server
  - The summative exercise is an intentionally unstructured, and designed to test you program design skills, in addition to implementation ability.
  - *Do not leave the summative exercise until the last minute: it's designed to be completed over the course of several weeks, and there is intentionally too much to complete in a hurry over a couple of days.*
- Examination: 80%
  - Exam format: answer all three questions




# Required Reading

- Any good text on computer networks, for example:
  - Peterson and Davie, *Computer Networks: A Systems Approach*, 5th Edition, Morgan Kaufman, 2011, ISBN 0123851386
  - Kurose and Ross, *Computer Networking: A Top-Down Approach*, 6th Edition, Addison-Wesley, 2012, ISBN 0273768964
  - Tanenbaum and Wetherall, *Computer Networks*, 5th Edition, Prentice Hall, 2010, ISBN 0132553171
- You are expected to read-along with the lectures – the lectures introduce the concepts, and the books provide detail


# Introduction to Networked Systems

# Networked Systems

- Autonomous computing devices which exchange data to perform some application goal
- The exchange of data is explicitly visible to the application – the system is aware of the network
- Applications using the Internet is one example, but other networks in widespread use:
  - Digital broadcast TV (e.g., FreeView in the UK)
  - Mobile voice telephony
  - Controller area networks connecting sensors and other components within vehicles or aircraft
  - Sensor networks
  - ...

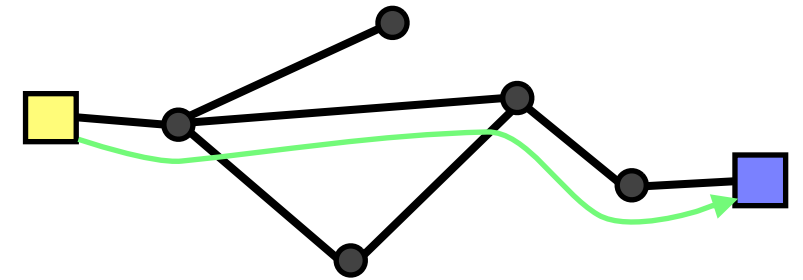

# Networked Systems

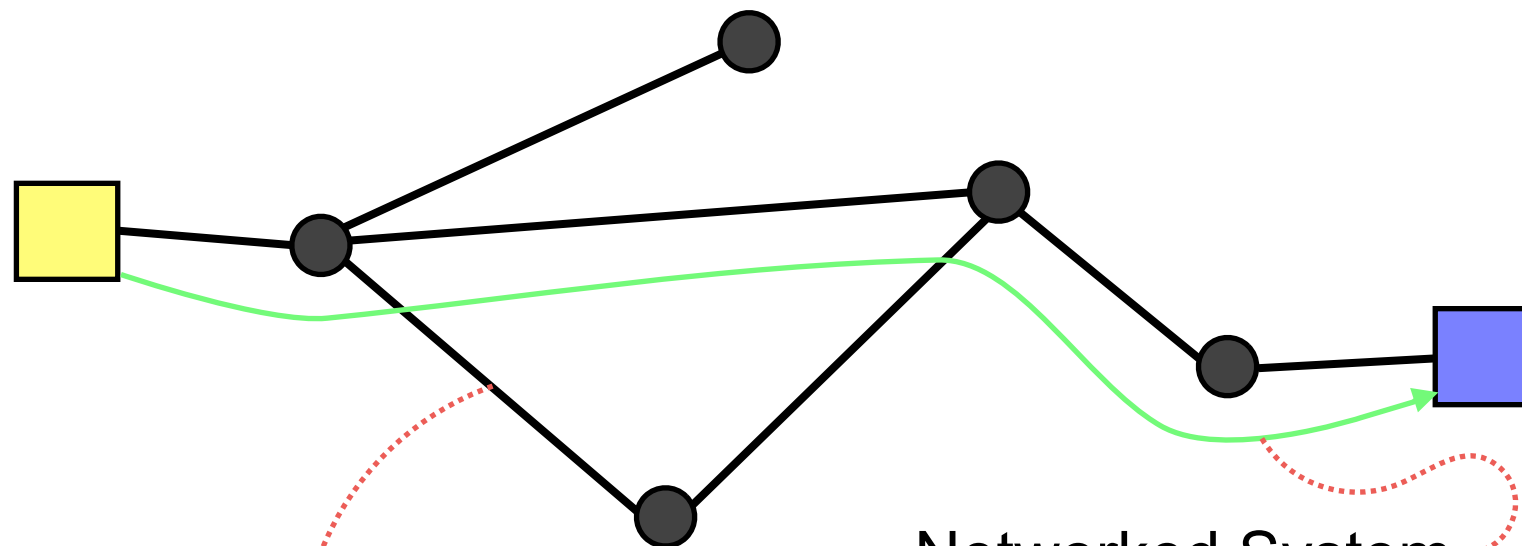

Networked System

– how do systems communicate across the network?


Networking

– how are links interconnected to build a wide-area network?

Communication

– how is information exchanged across a single link?

# Communication

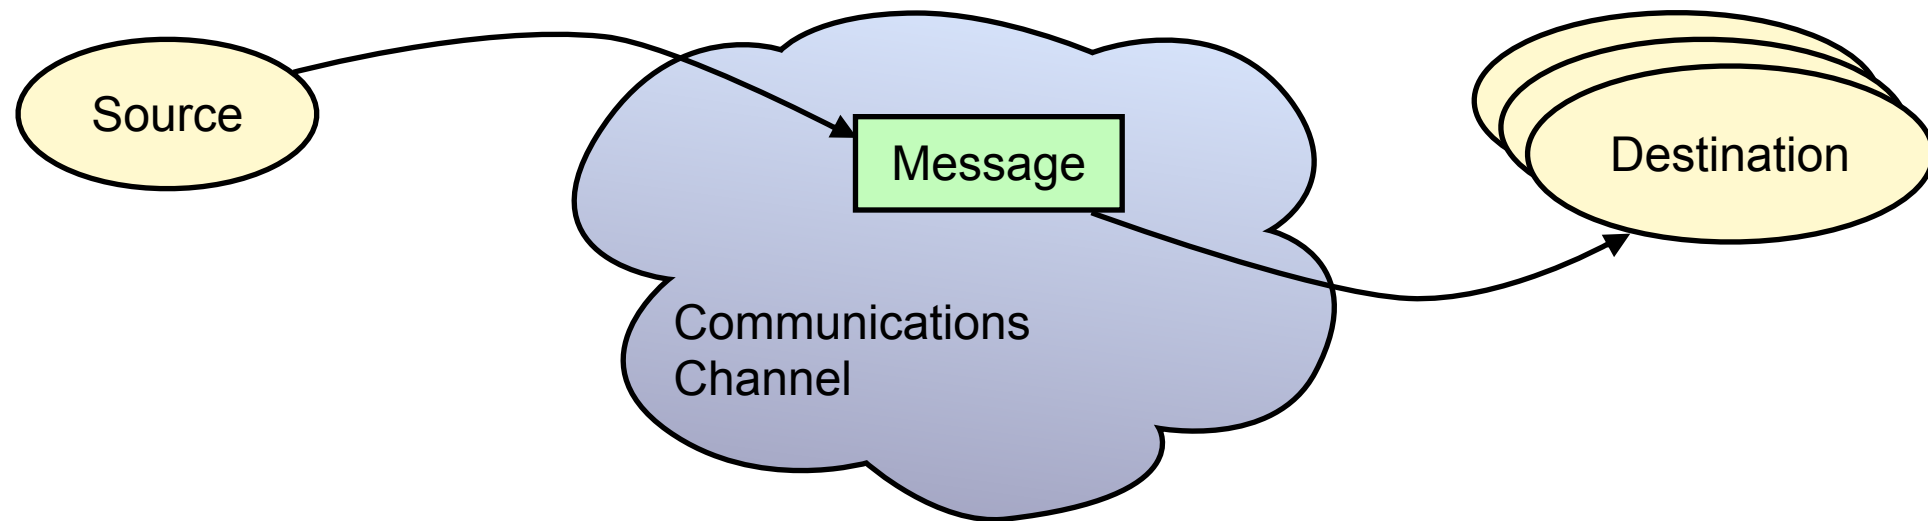

- Messages transferred from source to destination(s) via some communications channel
  - Size of messages might be bounded
  - Communication might be simplex, half- or full-duplex

# Information


- Messages convey *information*
  - The amount of information in a message can be characterised mathematically – *Information Theory*
- Capacity of channels to convey information can also be modelled
  - How much? How fast? How much power used?
  - Physical limits exist on the capacity of a channel

# Signals

- Physical form of a message is a *signal*
  - May be a material object (carrier pigeon, CD, ...)
  - Usually a wave (sound, electrical signal, light, radio, ...)
- Signal may be analogue or digital
  - Analogue: a smooth continuum of values
  - Digital: a sequence of discrete *symbols*
    - Mapping information to symbols is known as *coding*


# Analogue Signals

- Simplest analogue signal: amplitude directly codes value of interest
  - AM Radio, analogue telephones
- Can be arbitrarily accurate
- Susceptible to noise and interference on channel
- Difficult to process with digital electronics

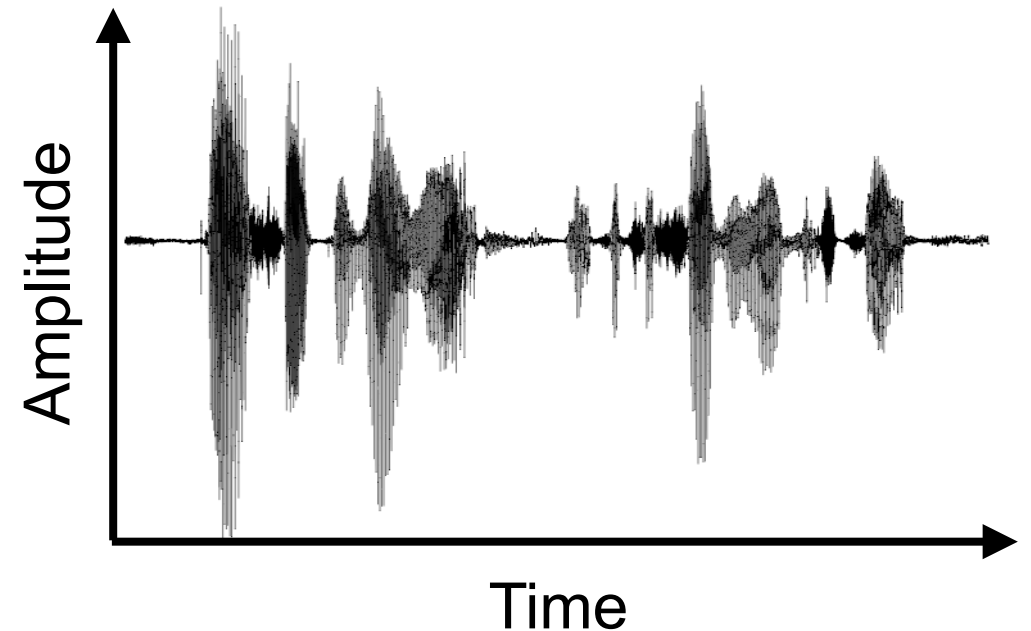



# Analogue Signals

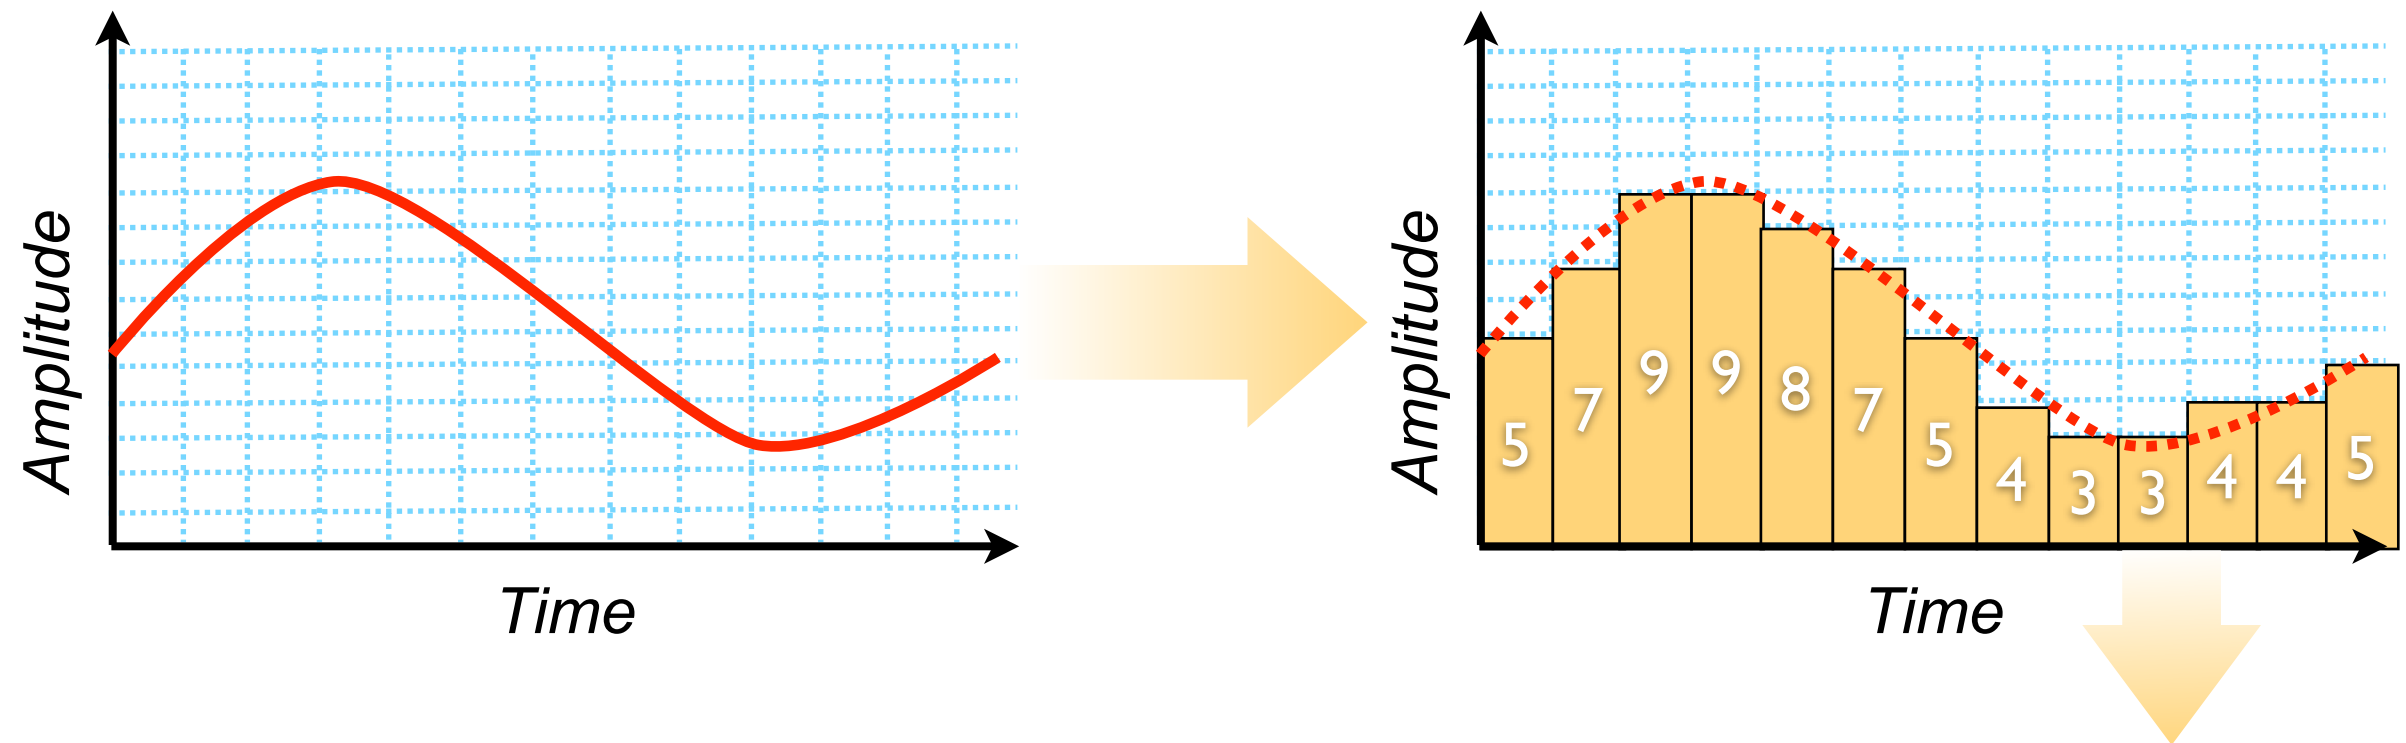


Any analogue signal can be represented digitally: *sample* the signal at a suitable rate, *quantise* to nearest allowable discrete value, and convert to digital representation

- The *sampling theorem* determines the rate at which the signal must be sampled for accurate reconstruction (→ lecture 3)

0101  
0111  
1001  
1001  
1000  
...

# Digital Signals

- Digital signals comprise a sequence of discrete symbols – fixed alphabet, not arbitrary values
  - But underlying channel is almost always *analogue*
  - Modulation used to map a digital signal onto the channel (→ lecture 4)
- Example: non-return to zero modulation:

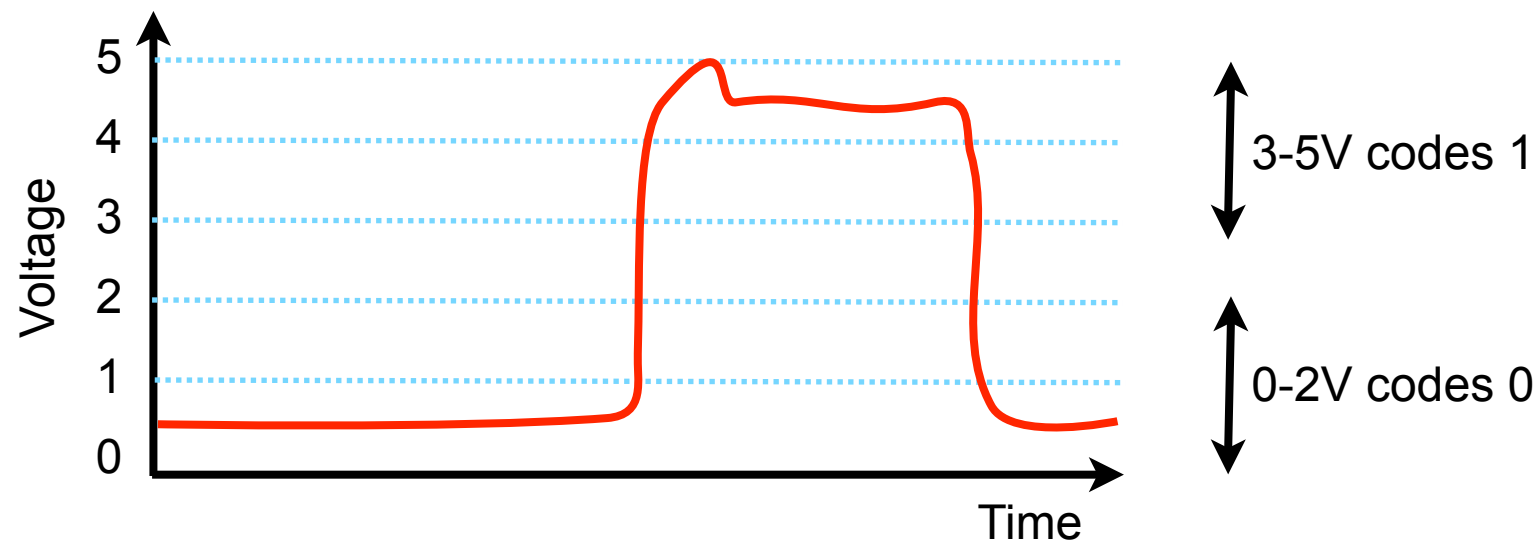

# Digital Signals: Baud Rate



- Computing systems use *binary* encoding
  - The digital signal comprises two symbols: 0 and 1
- Networked systems often use non-binary encoding
  - Example: wireless links frequently use *quadrature amplitude modulation* with either 16, 64, or 256 possible symbols (→ lecture 4)
  - Number of symbols transmitted per second is the *baud rate*

# Channels and Network Links


- A signal is conveyed via a channel
  - May be directly conveyed – electrical signals in a cable
  - May be modulated onto an underlying carrier – radio
- The combination of signal and channel forms a link

# From Links to Networks

- A link directly connects one or more hosts
- A network comprises several links connected together
  - The devices connecting the links are called either *switches* or *routers* depending on the type of network

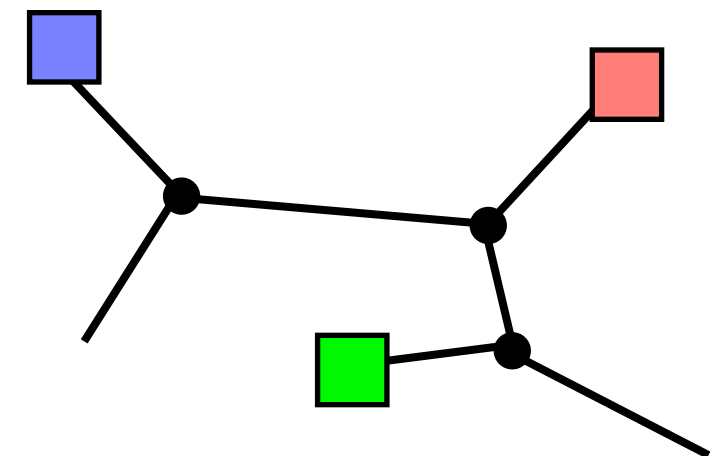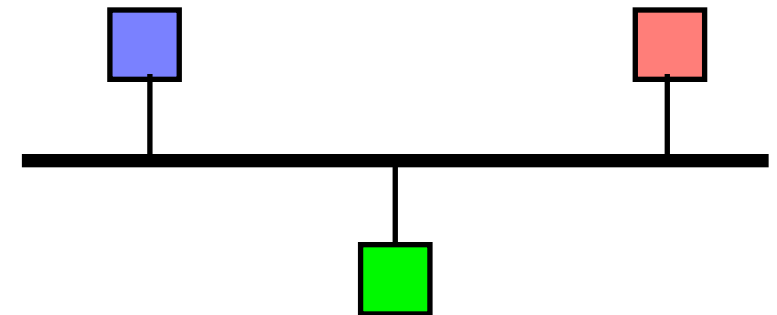


# Circuit Switched Networks

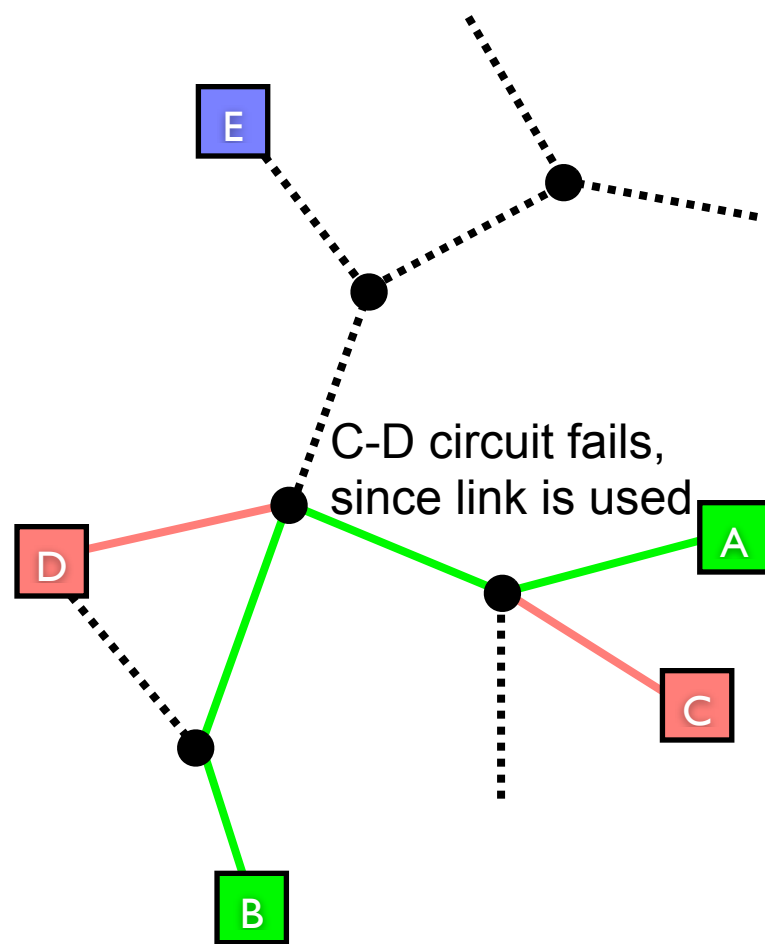

- A dedicated *circuit* can be set up for A and B to communicate
  - A and B exchange arbitrary length messages
  - Guaranteed capacity once circuit is created
  - But – the dedicated circuit can block other communications (e.g. the C to D path); the capacity of the network gives the blocking probability
- Example: traditional telephone network

# Packet Switched Networks

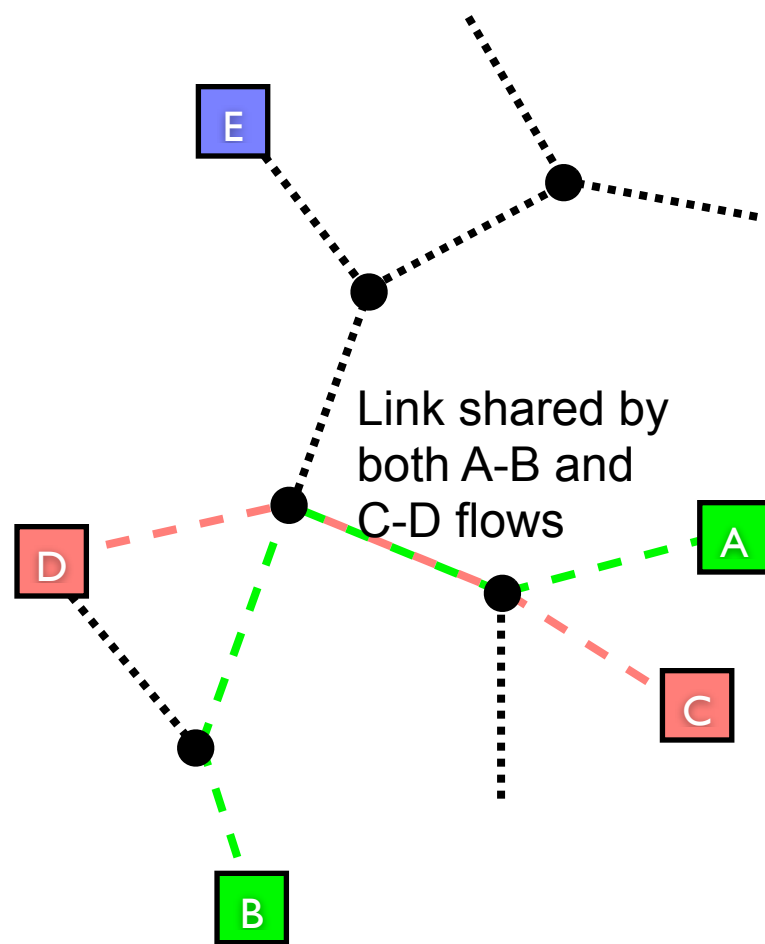

- Alternatively, messages can be split into small *packets* before transmission
  - Allows A-B and C-D to communicate at the same time, sharing the bottleneck link
  - Connectivity guaranteed, but the available capacity varies depending how many other people are using the network
  - Packets are small, and have a size constraint; a message can consist of many packets
  - Example: the Internet

# Networked Systems

- All networked systems built using these basic components:
  - Hosts – the source and destination(s)
  - Links – physical realisation of the channel, conveying messages
  - Switches/routers – connect multiple links
- Layered on top are *network protocols* which give meaning to the messages that are exchanged



# Summary

- Communication → networking → networked systems